

Use the machinery of
AASPA Equipment
pave the way to
success



FIXED FORM CANAL PAVER ROAD PAVER



SALIENT FEATURES

- High precision cylinder finish pavement for concrete slabs such as canal & reservoir.
- Finishing width from 3.5 m to 18 m.
Machine can finish up to 200 m² / hour. (According to site condition)
- Designed in a way for easy erection and transport.
- The special undercarriage consists of spreader auger to spread the concrete to level.
- The vibratory cylinder to compact and finish the concrete to the grade.
- Vibratory cylinder bracket for compaction and finishing.
- Machine can be used alternatively for bed and slope concrete lining.
- Special arrangement is made for PVC inserter, which can insert PVC longitudinally as well as vertically. Also groove cutter arrangement can be made as per requirement.

PVC INSERTER



Needle Vibrator (optional)



Groove Cutter



TECHNICAL SPECIFICATIONS

FRAME CONSTRUCTION

Frames are made from welded steel panels in standard length of 2', 4' and 8'. These are bolted together according to the size of the slab width.

LENGTH VARIABILITY

- Frames are pin bolted with each other for quick erection. The total length varies from 3.5 m to 18 m.
- Greater length can be supplied as per requirement.
- Overhead truss assembly is required only when frame length is more than 18m.

PRIME MOVER

- Driver End Panel – 5 HP Geared Motor.
- Greater length can be supplied as per requirement.
- Vibratory Cylinder – 5 HP Geared Motor.
- Bogie RH & LH -1 HP+ 1 HP Geared Motor
- Vibratory Cylinder -1 HP Electric Vibratory

EXTRA LONG AUGER




GANG VIBRATOR



UNDERCARRIAGE



CANAL PAVER

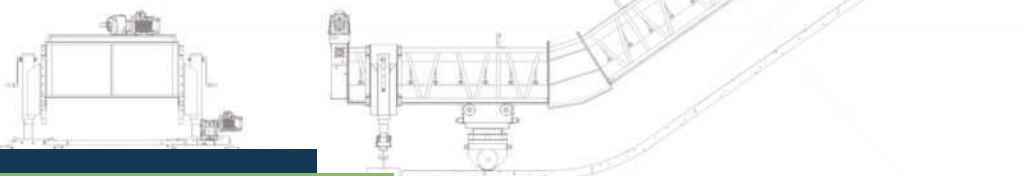

FINISHING ASSEMBLY

- The undercarriage travels with a speed of 152 fpm.
- Vibratory finish cylinder bracket.
- Cylinder: 10-inch diameter & 4 ft. long.
- Auger: 10-inch diameter (Extra-long with hard face welding to obtain maximum life).

CURVATURE FOR ANY SLOPE RATIO

- Slope ratio from 1:1, 1:1.5 and 2:1 as per customer's design.

OPTIONAL ACCESSORIES

- Trimming attachment
- PVC strip inserter
- Groove cutter
- Tailing arrangement
- High Frequency Needle Vibrator




CP 720 - CSP CANAL SLOPE PAVER


- Low power consumption with higher output.
- advanced energy efficient electric drive system with step less speed control.
- User-friendly, fast & accurate controls.



ROAD PAVER

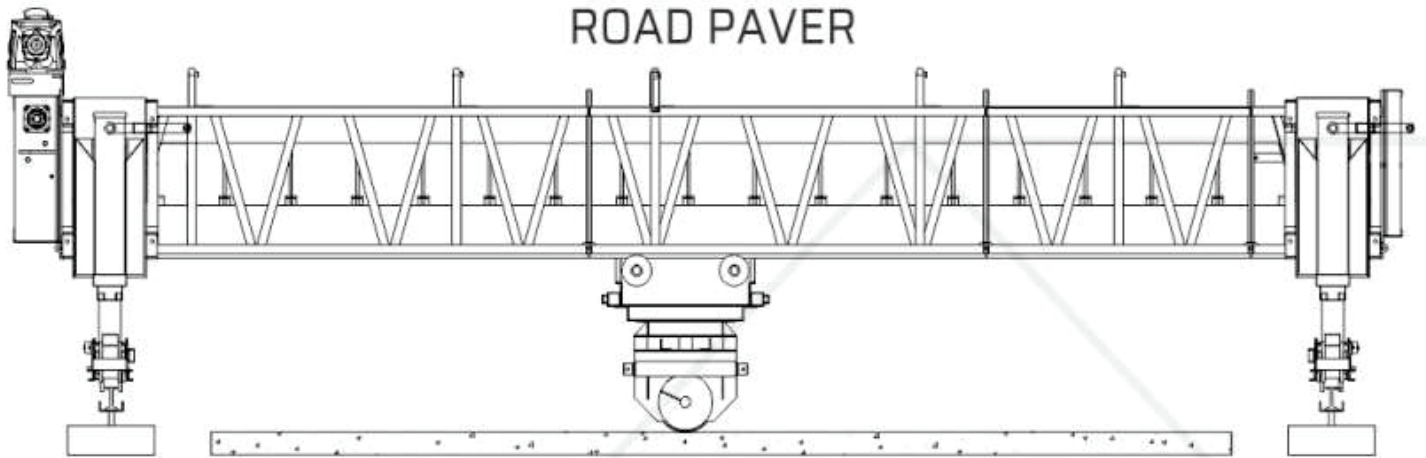

CANAL PAVER

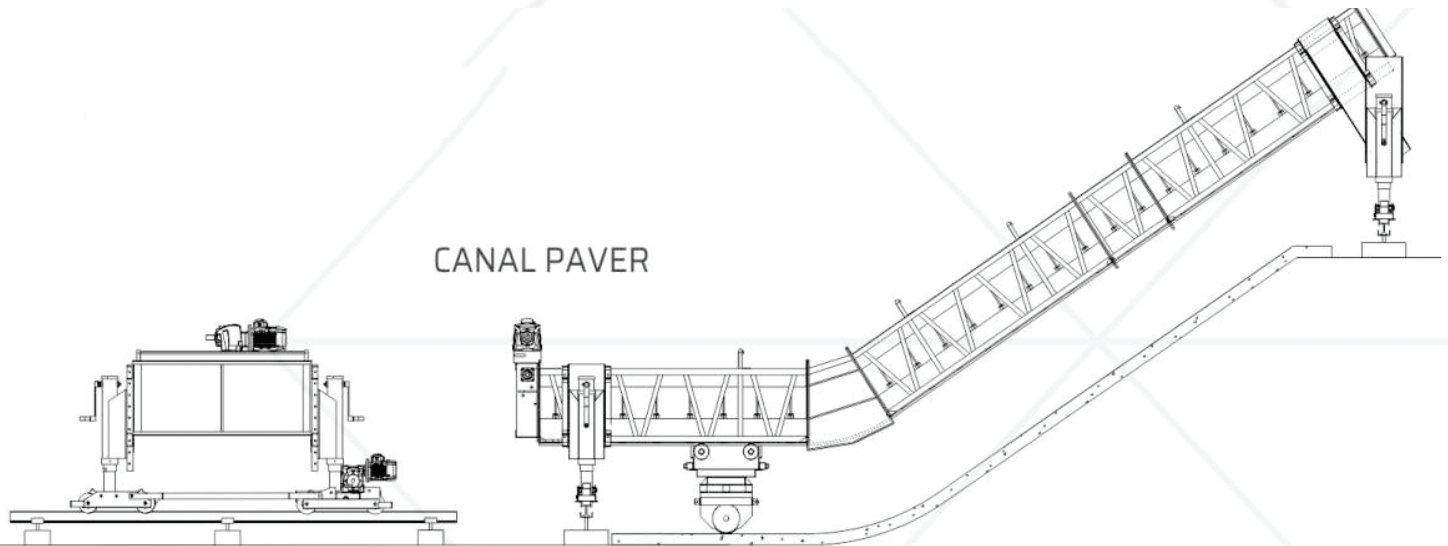

OUR PRODUCTS :



INLINE BATCHING PLANT



COMPACT BATCHING PLANT



SENSOR CONCRETE PAVER



TEXTURING & CURING MACHINE



CANAL PAVER



ROAD PAVER



FULL SECTION PAVER



SCREED PAVER

OUR EQUIPMENTS



ASPHALT PAVER



**ASPHALT DRUM
MIX PLANT**



**ROAD SWEEPER
MACHINE**



**ASPHALT BATCH MIX
PLANT**



**STATIONARY CONCRETE
BATCHING PLANT**



**KERB PAVER
MACHINE 1000**



**KERB PAVER
MACHINE 100**



**HORIZONTAL
STOREGE SILO**



**COMPACT CONCRETE
BATCHING PLANT**



**COUNTER FLOW DRUM
MIX PLANT**



**BITUMEN DRUM
DECANDER**



**KERB CUTTING
MACHINE**

OUR PLANTS

OUR SERVICE



➤ Contact Us

Aaspa Equipment Pvt.Ltd

- 📍 A-112,Sahjanand Business Park,Opp Palm Hotel ,Odhav, Ahmedabad,-382415
- ☎ +91 9898341024 +91 9428325161
- ✉ info@aaspaequipment.com,sales@aaspaequipment.com
- 🌐 www.aaspaequipment.com

Factory Address

- 📍 Survey.No.159,Kansarakui-Ganeshpura road Village Randala Visnagar - 384001 Mehsana Gujarat,india

