


Use the machinery of
AASPA Equipment
pave the way to
success



BITUMEN EMULSION SPAREYER



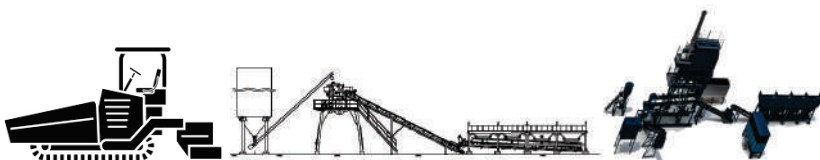

TANK

The tank is fabricated by a 5mm MS sheet and is coated with 40 mm glass wool. This is done to prevent heat loss. The outer covering is galvanized tank is better as it has long life due to its anti-corrosion properties. Tank is 6 inches. Manhole for maintenance or to all bitumen tank is if 500mm x 600mm. A manual Temperature gauge is provided for temperature display up to 300 Degrees Celsius.



ENGINE

Single stage air cooled diesel engine of 6.5 HP at 1500 RPM, engine powers bitumen pump and air compressor. Fuel consumption is 0.7-1 Liters per hour.



LATEST SEARCHES OF BITUMEN EMULSION SPRAYER

Best Bitumen Emulsion Sprayer With Compressor

Top Tractor Mounted Bitumen Sprayer

Best Bitumen Emulsion Sprayer Equipment

Bitumen emulsion BS-200 Price

Best Bitumen emulsion Sprayer BS-1000

Best bitumen hand sprayer for sale

Semi Automatic Bitumen Sprayer Price

bitumen sprayer price

Top emulsion sprayer equipment

Top Bitumen Emulsion Sprayer With Dust Remover

TECHNICAL SPECIFICATIONS

BITUMEN TANK	Capacity :3000 Liters Shape : U Shape Insulation : 40 mm thick with glasswool Temp. Gauge : 0-300°C Main Hole : 450 mm in diameter Mounting : Self chassis mounted on wheels
MANUAL HANDSPRAYING	Pipe Length : 3 meters Type of Pipe : S.S.corrugated hose pipe. Spraying Pressure :0-3kg/cm ²
BITUMEN PUMP	1.5"x1.5"Size positive displacement gear pump without put of 200-300 liters/min.
AIR COMPRESSOR	Standing make Air compressor
BURNER	Fule consumptio 7-8 liters/hour.
ENGINE FULE TANK	Capacity 5 liters
BURNER FUEL TANK	Capacity 20 liters
ENGINE	Standard make air cooled diesel engine powered by 6HP.

BITUMEN PUMP AND AIR COMPRESSOR

Both bitumen pumps and air compressor are engine driven. Bitumen pump is connected to the engine by a manual clutch. Just on engaging the clutch will activate the pump. Bitumen pump capacity 200 to 300 Liters per minute. 2 HP Single piston air compressor is provided.



BURNER

Single high pressure oil burner for adequate heating of viscous binder with oil consumption of 7-8 Liters/hrs. Burner compatible with Diesel



OUR EQUIPMENTS




ASPHALT PAVER



**ASPHALT DRUM
MIX PLANT**



**ROAD SWEEPER
MACHINE**

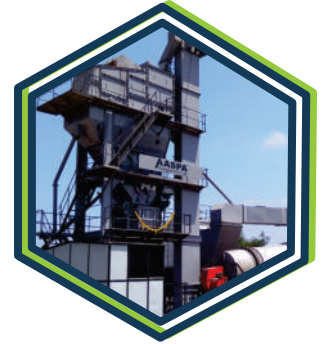

**ASPHALT BATCH MIX
PLANT**



**STATIONARY CONCRETE
BATCHING PLANT**



**KERB PAVER
MACHINE 1000**



**KERB PAVER
MACHINE 100**



**HORIZONTAL
STOREGE SILO**



**COMPACT CONCRETE
BATCHING PLANT**



**COUNTER FLOW DRUM
MIX PLANT**



**BITUMEN DRUM
DECANDER**



**KERB CUTTING
MACHINE**

OUR PLANTS

OUR SERVICE



➤ Contact Us

Aaspa Equipment Pvt.Ltd

- 📍 A-112,Sahjanand Business Park,Opp Palm Hotel ,Odhav, Ahmedabad,-382415
- ☎ +91 9898341024 +91 9428325161
- ✉ info@aaspaequipment.com,sales@aaspaequipment.com
- 🌐 www.aaspaequipment.com

Factory Address

- 📍 Survey.No.159,Kansarakui-Ganeshpura road Village Randala Visnagar - 384001 Mehsana Gujarat,india

